



DEAERATION FILTER

The MDH 250 "bubble-free" deaeration filter allows the reduction of air inflow into the tank through the filter. Thanks to its multiple connections and its differential indicator, it is adaptable to all systems.

ANTI-DRAIN MEMBRANE

BYPASS VALVE

FILTER ELEMENT WITH LARGE WAYS DESIGN

DIFFUSER INTEGRATED IN THE FILTER







APPLICATIONS

MOBILE EQUIPMENT

Agriculture & Forestry

Construction

Materials handling

Mining



INDUSTRIAL

Marine & Offshore Steel plant & Metal Processing Power Generation (including renewable)

Forming machines





FEATURES & BENEFITS

- Max working pressure 1 MPa (10 bar) flow rate up to 500 l/min
- MDH 250 length 2 and 4
- Reduction of air inflow into the tank through the filter
- Improved deaeration performance of the filter in the tank
- Lower pressure loss and higher working pressure than standard tank top return filters
- Bypass valve on the top with bayonet mount
- Stronger bypass system reducing vibrations
- Diffuser, integrated in the filter
- Easier filter element replacement
- Internal external filtration; it is possible to remove the filter element along with all contaminant
- Flanged connections 1 1/4" and 1 1/2" SAE 3000
- Threaded connections 1", 1 1/4" and 1 1/2" GAS/NPT/SAE
- Differential indicators (DES and DVS) available as accessories


DEAERATION FILTER



MDH 250

DEAERATION RETURN FILTER WITH HIGH FLOW RATE FLUID FLOW IN/OUT

- Multiple connections (multiport)
- Differential indicator
- Flanged connection
- Threaded connection



MDH filter with reduced air bubbles in the tank

MPFX 181

STANDARD TANK TOP RETURN FILTER FLUID FLOW OUT/IN

- 1 Threaded connection
- No differential indicator

STANDARD FILTERS

MPH 250

STANDARD RETURN FILTER WITH HIGH FLOW RATE FLUID FLOW IN/OUT


- Up to 2 Flanged connections
- · No differential indicator





WORLDWIDE NETWORK

CANADA • CHINA • FRANCE • GERMANY • INDIA • SINGAPORE UNITED ARAB EMIRATES • UNITED KINGDOM • USA

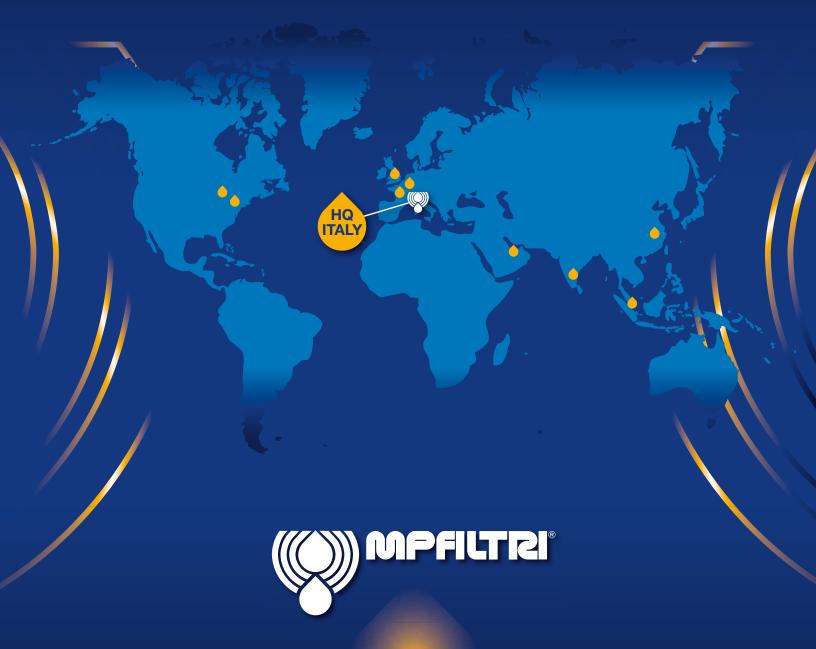

PASSION TO PERFORM



