

# FZP series

Maximum working pressure up to 42 Mpa (420 bar) - Flow rate up to 160 l/min




# TYPICAL FILTER SIZING Selection Software

## Step ①

Select "FILTER SIZING SOFTWARE" after login

OR



Select "FILTER SIZING" after login from a product page

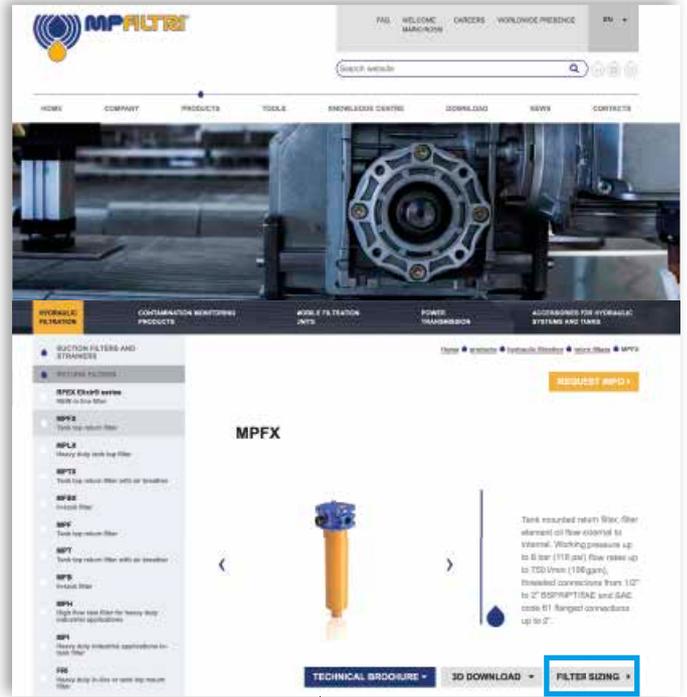

Choose the type of filter family.  
Enter the main data for sizing the filter  
then push CALCULATE.


## Step ②

Enter the main data for sizing the filter  
then push CALCULATE.

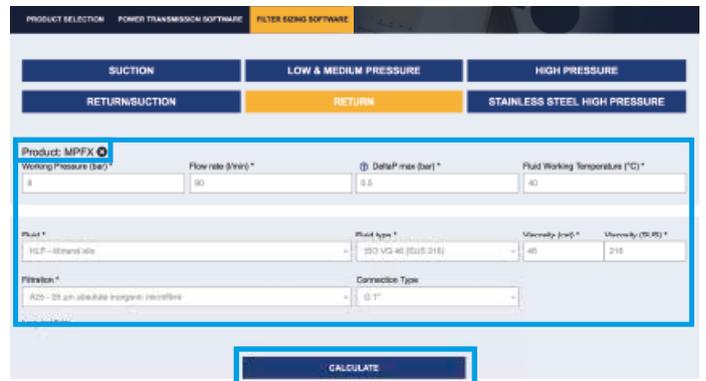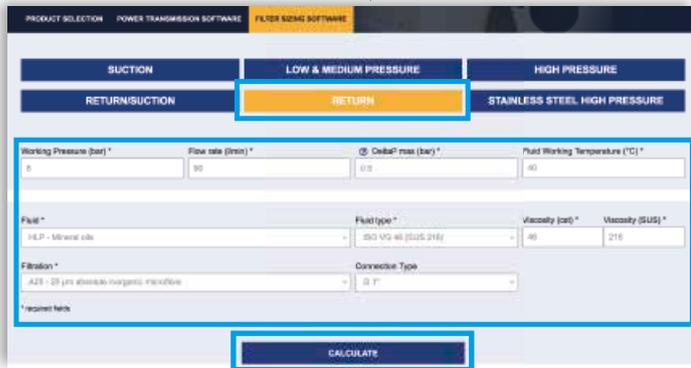

## Step ③

Select the desired options to choose the appropriate filter type for the application.

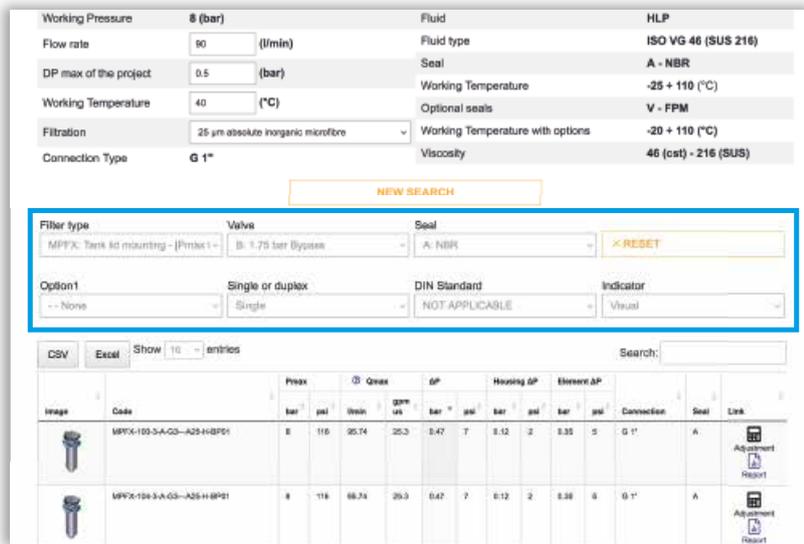

## Step 4

Choose the most suitable filter from the proposed list.

Image	Code	Peak bar	Qmax psi	Qmax m³/min	Qmax gpm us	AP bar	AP psi	Housing AP bar	Housing AP psi	Element AP bar	Element AP psi	Connection	Seal	Link
	MPFX-103-3-A-Q3-A25-H-BPFI	8	116	25.74	25.3	0.47	7	0.12	2	0.33	5	G 1"	A	
	MPFX-104-3-A-Q3-A25-H-BPFI	8	116	25.74	25.3	0.47	7	0.12	2	0.33	5	G 1"	A	

## Step 5

It is possible to change the filter modifying every parameter.



**A** SAVE YOUR FILTER'S REPORT



**B** MANUAL EDIT



SAVE IN YOUR ARCHIVE  
typing your reference data and then SAVE AS PDF



A new browser window displays the pdf

see **A**

Close the report window



By clicking your WELCOME button, the SHOW REPORTS is displayed: select it to see your filters list.

## Description

## Technical data

### Stainless steel high pressure filters

#### In-line

**Maximum working pressure up to 42 Mpa (420 bar)**  
**Flow rate up to 160 l/min**

FZP is a range of stainless steel high pressure filter for protection of sensitive components in high pressure hydraulic systems placed in difficult environmental conditions.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- 1 1/4" female threaded connections, for a maximum flow rate of 150 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters not provided with the bypass valve
- High collapse filter element "U", for use with aggressive fluids
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Off-shore equipment
- Water filtration systems
- Systems with strong or corrosive environmental conditions
- Systems with corrosive fluids

#### Filter housing materials

- Head: AISI 316L
- Housing: AISI 316L
- Bypass valve: AISI 316L

#### Seals

- Standard NBR series A (-25 °C to +110 °C)
- Optional FPM series V (-20 °C to +120 °C)
- Optional MFQ series F (-50 °C to +120 °C)

#### Bypass valve

Opening pressure 6 bar  $\pm$ 10%

#### Temperature

From -50 °C to +120 °C

#### Note

FZP filters are provided for vertical mounting

#### $\Delta p$ element type

Fluid flow through the filter element from OUT to IN

Microfibre filter elements - series R: 20 bar.

Element series "R":

- End cap: Nylon
- Core tube: Tinned Steel
- External/Internal support: Wire mesh Epox painted
- Media/Support/Pre-filter: Microfibre/Syntetic

Microfibre filter elements - series S: 210 bar.

Element series "S":

- End cap: Tinned Steel
- Core tube: Tinned Steel
- External support: Wire mesh Epox painted
- Internal support: Wire mesh Stainless Steel
- Media/Support/Pre-filter: Microfibre/Syntetic

Stainless Steel Microfibre filter elements series U: 210 bar.

Element series "U":

- End cap: Stainless Steel
- Core tube: Stainless Steel
- External support: Stainless Steel
- Internal support: Stainless Steel
- Media/Support/Pre-filter: Microfibre/Syntetic



## Weights [kg] and volumes [dm<sup>3</sup>]

Filter series	Weights [kg]				Volumes [dm <sup>3</sup> ]					
	Length	1	2	3	4	Length	1	2	3	4
<b>FZP 039</b>	-	-	4.5	5.1	5.6	-	-	0.19	0.26	0.34
<b>FZP 136</b>	8.3	8.3	10.2	11.5	-	0.45	0.78	1.00	-	-

Filter series	Length	Filter element design - R Series					Filter element design - S-U Series				
		A03	A06	A10	A16	A25	A03	A06	A10	A16	A25
<b>FZP 039</b>	<b>2</b>	19	25	43	50	59	19	23	41	45	55
	<b>3</b>	34	37	53	62	74	31	34	48	52	66
	<b>4</b>	42	46	63	72	81	38	41	55	71	78
<b>FZP 136</b>	<b>1</b>	63	67	102	108	136	47	53	87	89	127
	<b>2</b>	95	100	122	123	159	81	95	113	115	138
	<b>3</b>	122	124	148	150	160	106	116	135	141	151

### Maximum flow rate for a complete stainless steel high pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.


### Hydraulic symbols

Filter series	Style S	Style B	Style T	Style D	Style V	Style Z
<b>FZP 039</b>	•	•	•	•	•	•
<b>FZP 136</b>	•	•	•	•	•	•

### Pressure drop

Filter housings  $\Delta p$  pressure drop

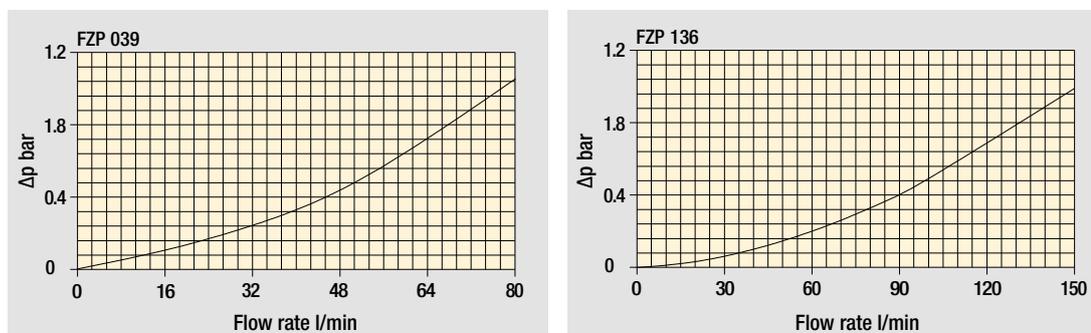

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example: FZP039	2	B	F	B	2	A03	U	P01
<b>FZP039</b>									
<b>Length</b>									
2   3   4									
<b>Valves</b>									
<b>S</b> Without bypass									
<b>B</b> With bypass 6 bar									
<b>T</b> With check valve, without bypass									
<b>D</b> With check valve, with bypass 6 bar									
<b>V</b> With reverse flow, without bypass									
<b>Z</b> With reverse flow, with bypass 6 bar									
<b>Seals</b>									
<b>A</b> NBR									
<b>V</b> FPM									
<b>F</b> MFQ									
<b>Connections</b>									
<b>A</b> G 1/2"									
<b>B</b> 1/2" NPT									
<b>C</b> SAE 8 - 3/4" - 16 UNF									
<b>Connections for differential indicators</b>									
<b>1</b> Without									
<b>2</b> With connection									
<b>Filtration rating (filter media)</b>									
<b>A03</b> Inorganic microfiber 3 µm									
<b>A06</b> Inorganic microfiber 6 µm									
<b>A10</b> Inorganic microfiber 10 µm									
<b>A16</b> Inorganic microfiber 16 µm									
<b>A25</b> Inorganic microfiber 25 µm									

Element Δp	Valves						Execution
	S	B	T	D	V	Z	
<b>R</b> 20 bar		•		•		•	<b>P01</b> MP Filtri standard
<b>S</b> 210 bar	•		•		•		<b>Pxx</b> Customized
<b>U</b> 210 bar, stainless steel filter element	•	•	•	•	•	•	

### FILTER ELEMENT

<b>Element series and size</b>	Configuration example: HP039	2	A03	F	U	P01
<b>HP039</b>						
<b>Element length</b>						
2   3   4						
<b>Filtration rating (filter media)</b>						
<b>A03</b> Inorganic microfiber 3 µm						
<b>A06</b> Inorganic microfiber 6 µm						
<b>A10</b> Inorganic microfiber 10 µm						
<b>A16</b> Inorganic microfiber 16 µm						
<b>A25</b> Inorganic microfiber 25 µm						


  

Seals	Element Δp	Valves						Execution
		S	B	T	D	V	Z	
<b>A</b> NBR	<b>R</b> 20 bar		•		•		•	<b>P01</b> MP Filtri standard
<b>V</b> FPM	<b>S</b> 210 bar	•		•		•		<b>Pxx</b> Customized
<b>F</b> MFQ	<b>U</b> 210 bar, stainless steel filter element	•	•	•	•	•	•	

### ACCESSORIES


Differential indicators	page		page
<b>DEH</b> Hazardous area electronic differential indicator	642	<b>DVX</b> Visual differential indicator	643
<b>DEX</b> Electrical differential indicator	643	<b>DVY</b> Visual differential indicator	644
<b>DLX</b> Electrical / visual differential indicator	643		
Additional features	page		
<b>X2</b> Plug	644		

FZP039	
Filter length	H [mm]
2	179
3	222
4	266
Connections	R
A	M6
B - C	1/4" UNC

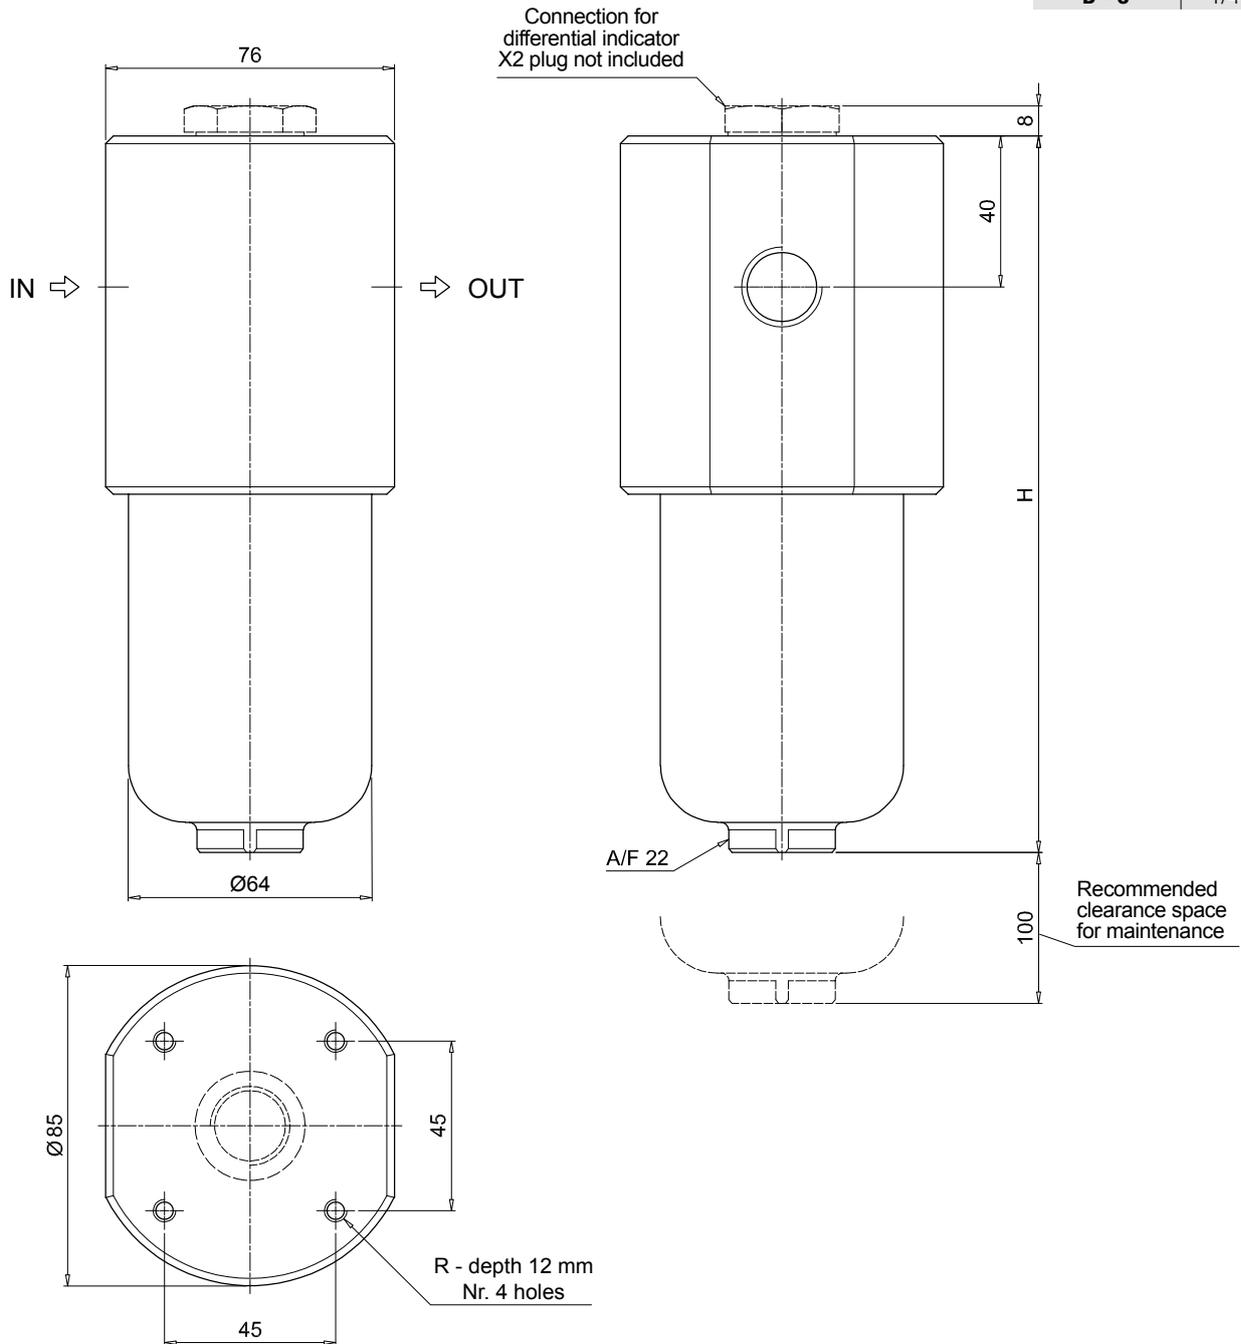



FZP136	
Filter length	H [mm]
<b>1</b>	222
<b>2</b>	335
<b>3</b>	410
Connections	R
<b>A</b>	M10
<b>B - C</b>	3/8" UNC
<b>D</b>	M10
<b>E - F</b>	3/8" UNC
<b>G</b>	M10
<b>H - I</b>	3/8" UNC

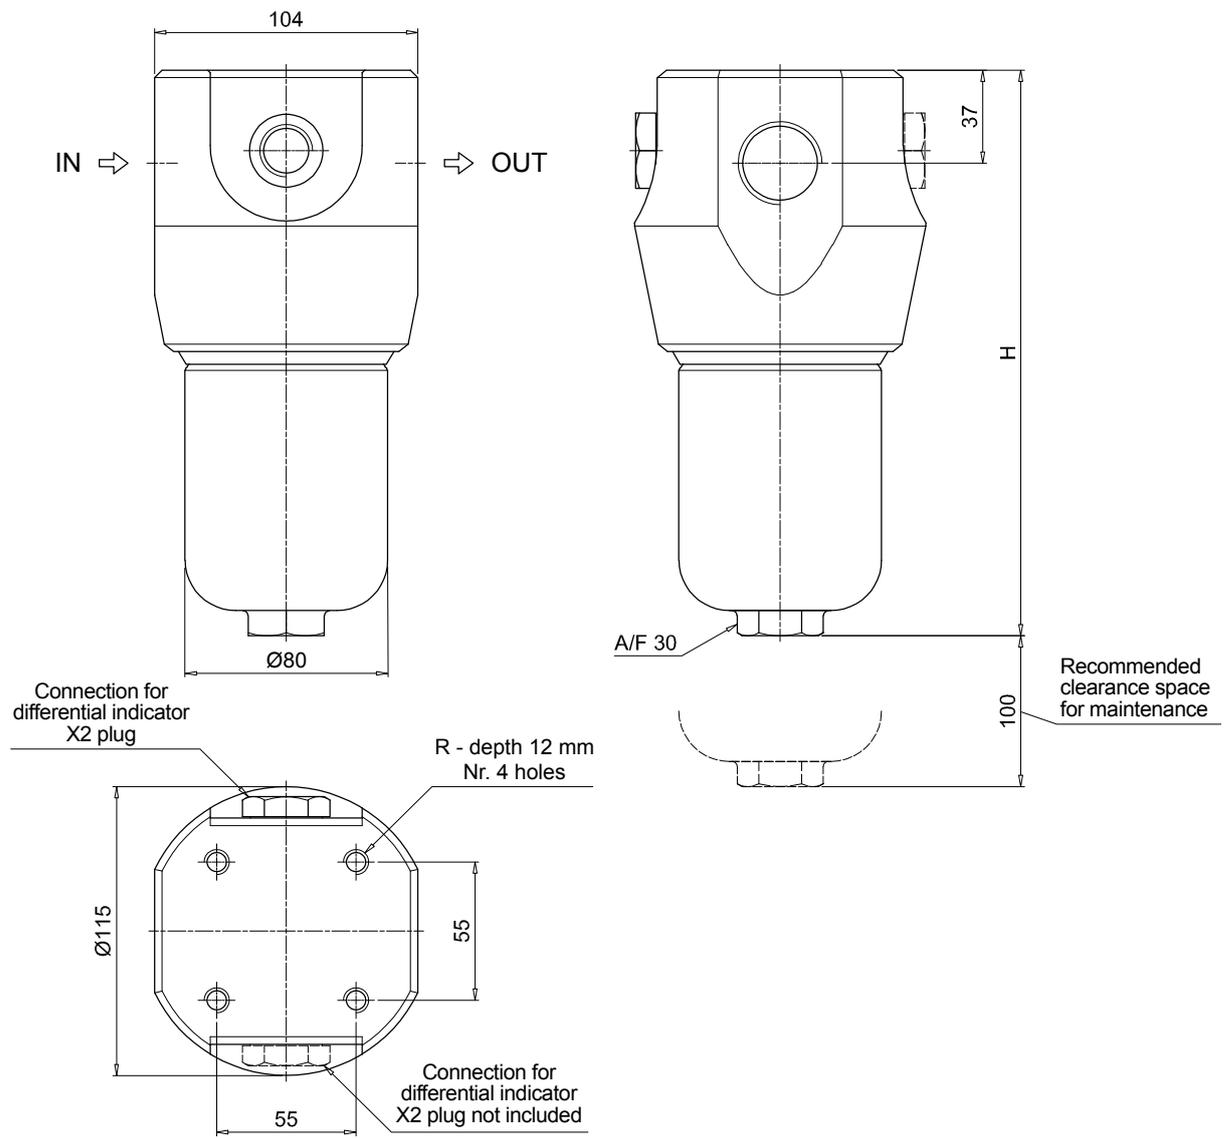



The position of the X2 plug is reversible

# FZP SPARE PARTS

Order number for spare parts

FZP 039

FZP 136

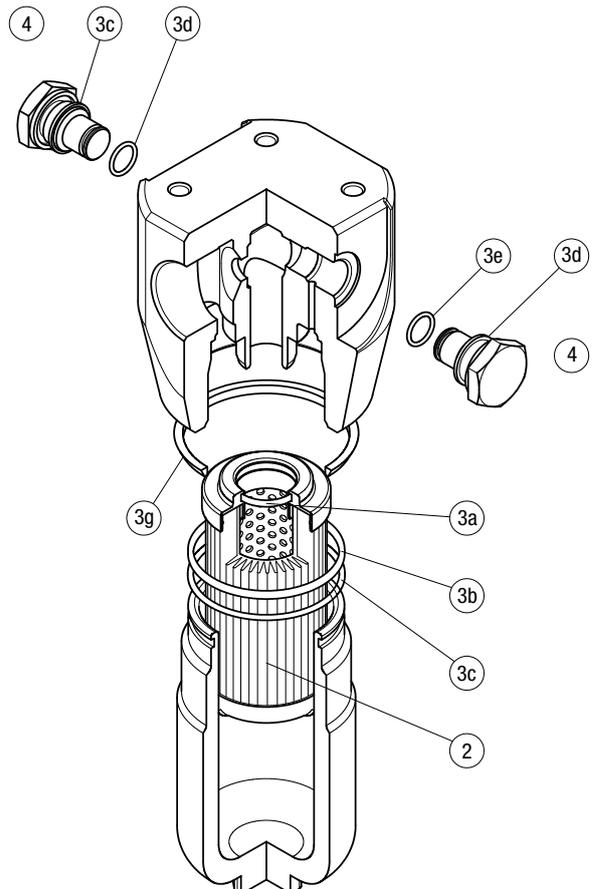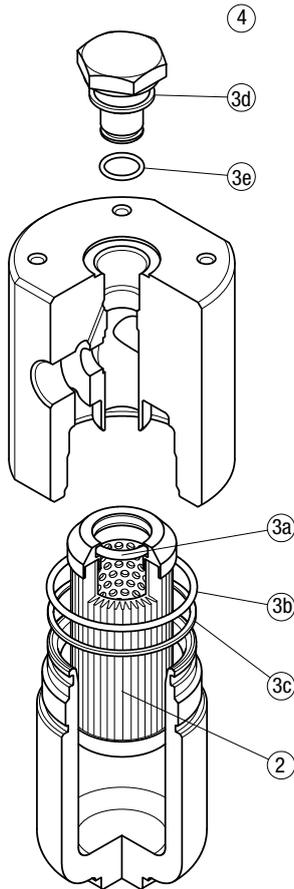

Item:	Q.ty: 1 pc.		Q.ty: 1 pc.		Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number		Indicator connection plug		
FZP 039	See order table	NBR	FPM	NBR	FPM	
		02050299	02050300	X2H	X2V	
<b>FZP 136</b>		02050636	02050637			