

NEW

Return filters

MPTX 116

Maximum working pressure up to 800 kPa (8 bar) - Flow rate up to 300 l/min



PASSION TO PERFORM



FILTER SIZING

THE CORRECT FILTER SIZING HAVE TO BE BASED ON THE TOTAL PRESSURE DROP DEPENDING BY THE APPLICATION. THE MAXIMUM TOTAL PRESSURE DROP ALLOWED BY A NEW AND CLEAN RETURN FILTER HAVE TO BE IN THE RANGE 0.4 ÷ 0.6 bar.

The pressure drop calculation is performed by adding together the value of the housing with the value of the filter element. The pressure drop Δp_c of the housing is proportional to the fluid density (kg/dm^3); all the graphs in the catalogue are referred to mineral oil with density of $0.86 \text{ kg}/\text{dm}^3$.

The filter element pressure drop Δp_e is proportional to its viscosity (mm^2/s), the corrective factor Y have to be used in case of an oil viscosity different than $30 \text{ mm}^2/\text{s}$ (cSt).

Sizing data for single filter element, head at top

Δp_c = Filter housing pressure drop [bar]

Δp_e = Filter element pressure drop [bar]

Y = Corrective factor Y (see correspondent table), depending on the filter type, on the filter element size, on the filter element length and on the filter media

Q = flow rate (l/min)

V1 reference oil viscosity = $30 \text{ mm}^2/\text{s}$ (cSt)

V2 = operating oil viscosity in mm^2/s (cSt)

Filter element pressure drop calculation with an oil viscosity different than $30 \text{ mm}^2/\text{s}$ (cSt)

$$\Delta p_e = Y : 1000 \times Q \times (V2:V1)$$

$$\Delta p_{\text{Tot.}} = \Delta p_c + \Delta p_e$$

Verification formula

$$\Delta p_{\text{Tot.}} \leq \Delta p_{\text{max allowed}}$$

Maximum total pressure drop (Δp_{max}) allowed by a new and clean filter

Application	Range (bar)
Suction filters	0.08 ÷ 0.10
Return filters	0.4 ÷ 0.6
	0.4 ÷ 0.6 return lines
	0.3 ÷ 0.5 lubrication lines
Low & Medium Pressure filters	0.3 ÷ 0.4 off-line in power systems
	0.1 ÷ 0.3 off-line in test benches
	0.4 ÷ 0.6 over-boost
High Pressure filters	0.8 ÷ 1.5
Stainless Steel filters	0.8 ÷ 1.5

MPTX calculation example

Application data:

Tank top return filter

Pressure Pmax = 8 bar

Flow rate Q = 120 l/min

Viscosity V2 = $46 \text{ mm}^2/\text{s}$ (cSt)


Oil density = $0.86 \text{ kg}/\text{dm}^3$

Required filtration efficiency = $25 \mu\text{m}$ with absolute filtration

With bypass valve and G1 1/4" inlet connection

Calculation:

$\Delta p_c = 0.03 \text{ bar}$ (see graphic below)

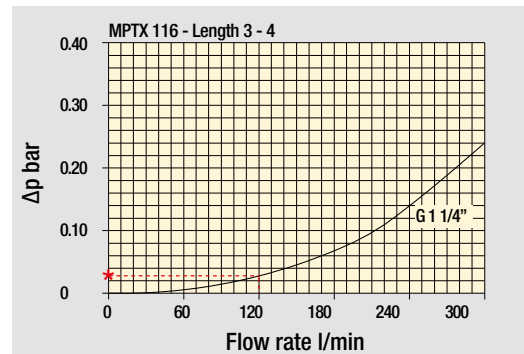

Filter housings Δp pressure drop.

The curves are plotted using mineral oil with density of $0.86 \text{ kg}/\text{dm}^3$ in compliance with ISO 3968. Δp varies proportionally with density.

$$\Delta p_e = (2.50 : 1000) \times 120 \times (46 : 30) = 0.46 \text{ bar}$$

MPTX corrective factor

Corrective factor Y to be used for the filter element pressure drop calculation.

The values depend to the filter size and length and to the filter media.

Reference oil viscosity $30 \text{ mm}^2/\text{s}$

Filter element	Absolute filtration H Series					Nominal filtration N Series			
	A03	A06	A10	A16	A25	P10	P25	M25 M60 M90	
Type									
MFX 100	1	28.20	24.40	8.67	8.17	6.88	4.62	3.96	1.25
	2	17.33	12.50	6.86	5.70	4.00	3.05	2.47	1.10
	3	10.25	9.00	3.65	3.33	2.50	1.63	1.32	0.96
	4	6.10	5.40	2.30	2.20	2.00	1.19	0.96	0.82

$$\Delta p_{\text{Tot.}} = 0.03 + 0.46 = 0.49 \text{ bar}$$

The selection is correct because the total pressure drop value is inside the admissible range for tank top return filters.

In case the allowed max total pressure drop is not verified, it is necessary to repeat the calculation changing the filter size.

Flow rates [l/min]

Filter series	Length	Filter element design - H series					Filter element design - N series		
		A03	A06	A10	A16	A25	M25 M60 M90	P10	P25
MPTX 116	1	18	20	53	56	65	153	87	96
	2	28	38	65	75	95	158	111	123
	3	48	55	125	135	169	289	224	251
	4	79	89	180	185	198	306	264	289

Maximum flow rate for a complete return filter with a pressure drop $\Delta p = 0.5 \text{ bar}$.

Connections of filter under test: G1 1/4"

The reference fluid has a kinematic viscosity of $30 \text{ mm}^2/\text{s}$ (cSt) and a density of $0.86 \text{ kg}/\text{dm}^3$.

For different pressure drop or fluid viscosity we recommend to use our selection software available on www.mpfiltri.com.

Please, contact our Sales Department for further additional information.



MPTX 116 GENERAL INFORMATION

Technical data

Return filter

Maximum working pressure up to 800 kPa (8 bar)

Flow rate up to 300 l/min

MPTX is a range of return filters with integrated breather filter, for protection of the reservoir against the system contamination.

They are directly fixed to the reservoir, in immersed or semi-immersed position. The filter output must be always immersed into the fluid to avoid aeration or foam generation into the reservoir.

Available features:

- Female threaded connections up to 1 1/4", for a maximum flow rate of 300 l/min
- Multiple connections, to connect several return lines or drains
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve integrated into the filter element, to relieve excessive pressure drop across the filter media
- 2, 4 or 6 fixing holes for installation, to meet any reservoir surface flatness and roughness
- O-ring or Flat seal, to meet any reservoir surface flatness and roughness
- Screw-in cover with a special shape, to allow the filter element replacement without the use of specific tools
- Oil dipstick, to easily check the level of the fluid into the reservoir (sold as separate item)
- Extension tube, to be used in deep reservoirs (sold as separate item)
- Diffuser, to reduce the risk of aeration, foaming and noise (sold as separate item)
- Integrated breather filter, to clean the air that moves into the reservoir as result of the oil level fluctuation
- Integrated breather filter with pressurization valve, to clean the air that moves into the reservoir as result of the oil level fluctuation and to guarantee the pressurization into the reservoir
- Visual, electrical and electronic clogging indicators
- MYclean interface connection, to protect the product against non-original spare parts
- External protective wrap, to optimize the flow through the element and to save the element efficiency against non-proper handling

Common applications:

- Light industrial equipment
- Mobile application

Filter housing materials

- Head: Aluminium
- Cover: Nylon
- Bowl: Nylon

Bypass valve

- Opening pressure 175 kPa (1.75 bar) $\pm 10\%$
- Opening pressure 300 kPa (3 bar) $\pm 10\%$

Δp element type

- Microfibre filter elements - series H: 10 bar
- Fluid flow through the filter element from OUT to IN

Seals

- Standard NBR series A
- Optional FPM series V

Temperature

From -25 °C to +110 °C

Note


MPTX filters are provided for vertical mounting



Weights [kg] and volumes [dm³]



	Weights [kg]				Volumes [dm ³]					
	Length	1	2	3	4	Length	1	2	3	4
MPTX 116		1.10	1.15	1.25	1.50		0.72	0.93	1.28	1.74

Hydraulic symbols


Filter series	Style 1 connection	
MPTX 116	•	

Pressure drop

Filter housings Δp pressure drop

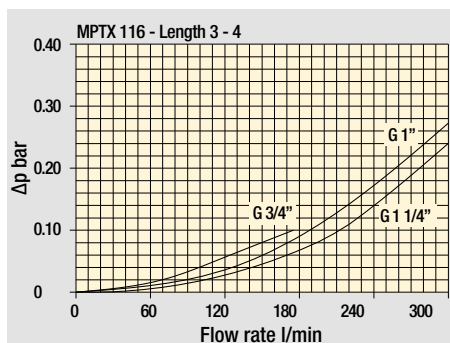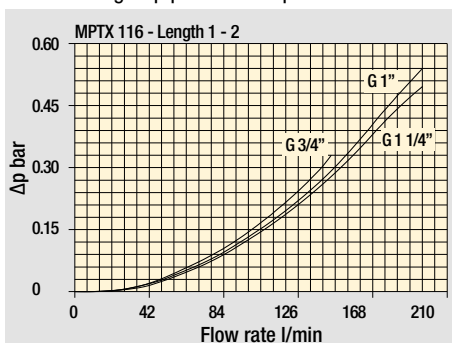

Bypass valve pressure drop

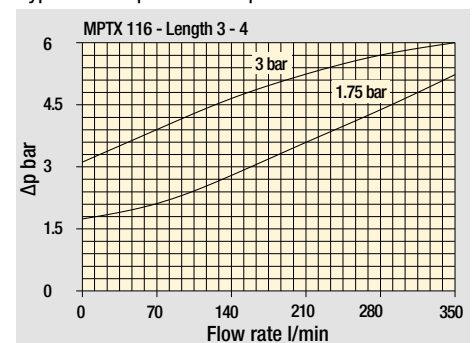

The curves are plotted using mineral oil with density of 0.86 kg/dm³ in compliance with ISO 3968. Δp varies proportionally with density.

MPTX 116

Designation & Ordering code

COMPLETE FILTER

Series and size		Configuration example 1: MPTX116 1 S A G1 M90 E P01																															
MPTX116 Filter element with private spigot		Configuration example 2: MPTX116 2 S Z G9 A03 B P01																															
Length		1 2 3 4																															
Air breather		S Without air breather																															
Seals and treatments		<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="3">Filtration rating</th> </tr> <tr> <th colspan="2"></th> <th>Axx</th> <th>Mxx</th> <th>Pxx</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>NBR</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>V</td> <td>FPM</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>W</td> <td>NBR head anodized</td> <td>•</td> <td>•</td> <td></td> </tr> <tr> <td>Z</td> <td>FPM head anodized</td> <td>•</td> <td>•</td> <td></td> </tr> </tbody> </table>				Filtration rating					Axx	Mxx	Pxx	A	NBR	•	•	•	V	FPM	•	•	•	W	NBR head anodized	•	•		Z	FPM head anodized	•	•	
		Filtration rating																															
		Axx	Mxx	Pxx																													
A	NBR	•	•	•																													
V	FPM	•	•	•																													
W	NBR head anodized	•	•																														
Z	FPM head anodized	•	•																														
Flat seal on the head on request																																	
Connections																																	
G1 G 3/4"	G6 1 1/4" NPT																																
G2 G 1"	G7 SAE 12 - 1 1/16" - 12 UN																																
G3 G 1 1/4"	G8 SAE 16 - 1 5/16" - 12 UN																																
G4 3/4" NPT	G9 SAE 20 - 1 5/8" - 12 UN																																
G5 1" NPT																																	
Filtration rating (filter media)																																	
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm																																
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm																																
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm																																
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm																																
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm																																
		<table border="1"> <thead> <tr> <th colspan="2">Bypass valve</th> <th colspan="2">Execution</th> </tr> </thead> <tbody> <tr> <td>E</td> <td>3 bar</td> <td>P01</td> <td>MP Filtri standard</td> </tr> <tr> <td>B</td> <td>1.75 bar</td> <td>Pxx</td> <td>Customized</td> </tr> </tbody> </table>		Bypass valve		Execution		E	3 bar	P01	MP Filtri standard	B	1.75 bar	Pxx	Customized																		
Bypass valve		Execution																															
E	3 bar	P01	MP Filtri standard																														
B	1.75 bar	Pxx	Customized																														

FILTER ELEMENT

Element series and size		Configuration example 2: MFX100 1 M90 N B E P01																										
MFX100 Filter element with private spigot		Configuration example 1: MFX100 2 A03 W V P01																										
Element length		1 2 3 4																										
Filtration rating (filter media)																												
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm																											
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm																											
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm																											
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm																											
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm																											
Element Δp		<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="3">Filter media</th> </tr> <tr> <th colspan="2"></th> <th>Axx</th> <th>Mxx</th> <th>Pxx</th> </tr> </thead> <tbody> <tr> <td>N</td> <td>10 bar</td> <td></td> <td>•</td> <td>•</td> </tr> <tr> <td>H</td> <td>10 bar</td> <td>•</td> <td></td> <td></td> </tr> <tr> <td>W</td> <td>10 bar, compatible with fluids HFA, HFB and HFC</td> <td>•</td> <td>•</td> <td></td> </tr> </tbody> </table>				Filter media					Axx	Mxx	Pxx	N	10 bar		•	•	H	10 bar	•			W	10 bar, compatible with fluids HFA, HFB and HFC	•	•	
		Filter media																										
		Axx	Mxx	Pxx																								
N	10 bar		•	•																								
H	10 bar	•																										
W	10 bar, compatible with fluids HFA, HFB and HFC	•	•																									
		<table border="1"> <thead> <tr> <th colspan="2">Seals</th> <th colspan="2">Bypass valve</th> <th colspan="2">Execution</th> </tr> </thead> <tbody> <tr> <td>B</td> <td>NBR</td> <td>E</td> <td>3 bar</td> <td>P01</td> <td>MP Filtri standard</td> </tr> <tr> <td>V</td> <td>FPM</td> <td></td> <td>1.75 bar</td> <td>Pxx</td> <td>Customized</td> </tr> </tbody> </table>		Seals		Bypass valve		Execution		B	NBR	E	3 bar	P01	MP Filtri standard	V	FPM		1.75 bar	Pxx	Customized							
Seals		Bypass valve		Execution																								
B	NBR	E	3 bar	P01	MP Filtri standard																							
V	FPM		1.75 bar	Pxx	Customized																							

ACCESSORIES

Indicators			
BVA Axial pressure gauge	BEA Electrical pressure indicator		
BVR Radial pressure gauge	BEM Electrical pressure indicator		
BVP Visual pressure indicator with automatic reset	BLA Electrical / visual pressure indicator		
BVQ Visual pressure indicator with manual reset			
Additional features			
TE Extension tube	DPT Dipstick		
DFS Diffuser with fast lock connection			


MPTX 116

Dimensions

MPTX116


Filter length	H1 [mm]	H2 [mm]
1	99	120
2	146	170
3	224	250
4	326	350

Connections	T
G1-G2-G3	G 1/8"
G4-G5-G6-G7-G8-G9	1/8" NPT

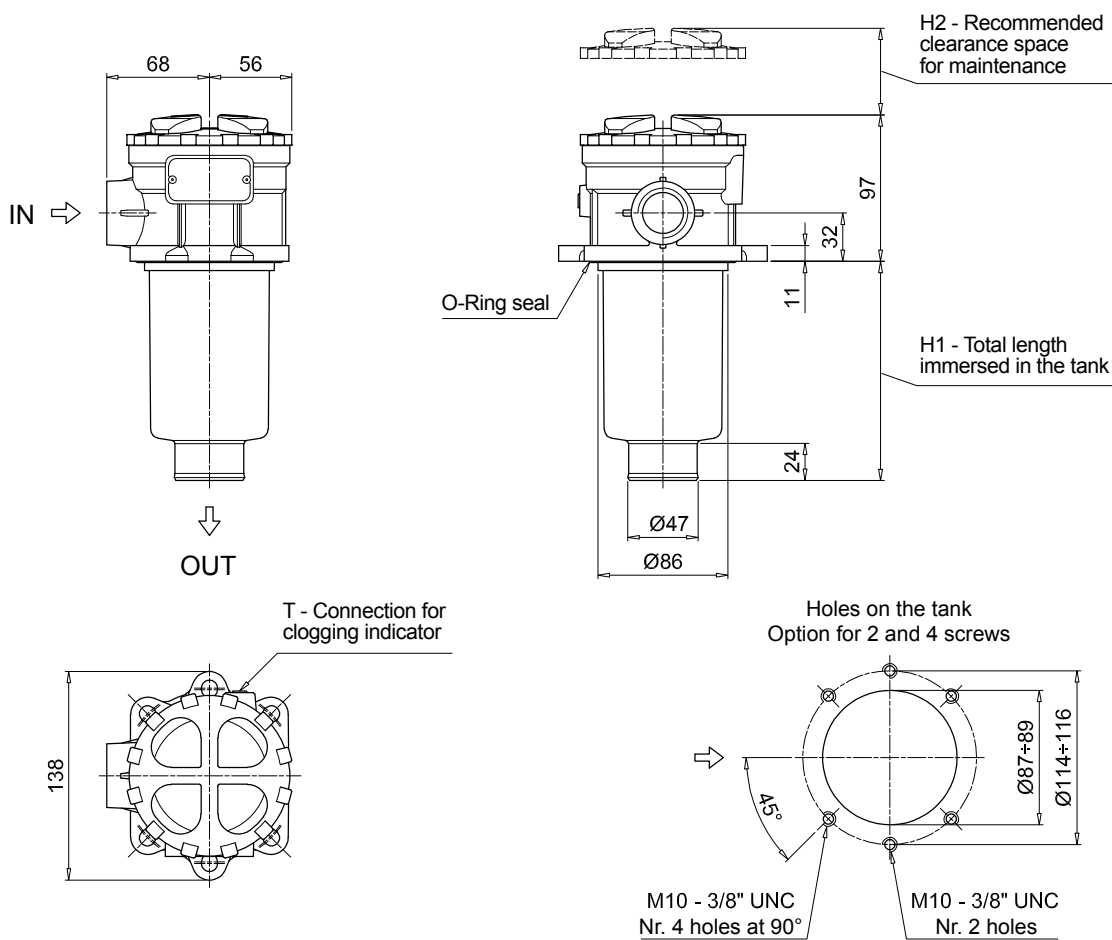

MPTX 116 SPARE PARTS

Order number for spare parts

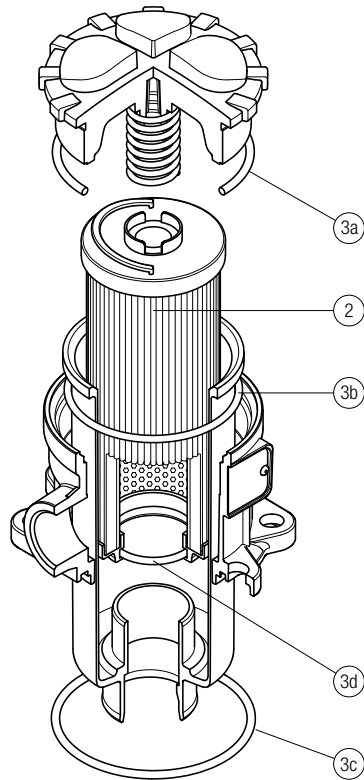

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number	
		NBR	FPM
MPTX 116	See order table	02050737	02050738

All data, details and words contained in this publication are provided for information purposes only.
MP Filtri reserves the right to make modifications to the models and versions of the described products
at any time for both technical and / or commercial reasons.
The colors and the pictures of the products are purely indicative.
Any reproduction, partial or total, of this document is strictly forbidden.
All rights are strictly reserved.





WORLDWIDE NETWORK

HEADQUARTERS

MP Filtri S.p.A.

Via 1° Maggio, 3
20060 Pessano con Bornago
Milano - Italy

BRANCH OFFICES

MP Filtri U.K. Ltd.

Bourton Industrial Park
Bourton on the Water
GL54-2HQ Gloucestershire

MP Filtri Canada Inc.

8831 Keele Street
Concord, Ontario
L4K 2N1 - Canada

MP Filtri Germany GmbH

Hans-Wilhelmi-Straße
DE-66386 St. Ingbert

ITALFILTRI LLC

Russian Federation

Yurievsky Pereulok 13 a, Building 1
111020 Moscow - Russia

MP Filtri France SAS

Parc d'activités des Chanteraines
8 rue du Commandant d'Estienne d'Orves
Immeuble D3
92390 Villeneuve la Garenne

MP Filtri (Shanghai) Co., Ltd.

1280 Lianxi Road, Bld 8 - 2nd Floor
Shanghai - Pudong
201204 China

MP Filtri U.S.A. Inc.

2055 Quaker Pointe Drive
Quakertown, PA 18951

MP Filtri India Pvt. Ltd.

Plot-7F, Raj Pinnacle,
Beside RMZ Centennial
Brookefield Road, Whitefield
560048 Bangalore

PASSION TO PERFORM



mpfiltri.com